



**Netshield (Pty) Ltd.**  
Tijger Valley Office Park, Concept House,  
10 Pony Street, Silver Lakes, Pretoria.


P.O. Box 1223, Wapadrand 0050

Telephone: +27(0)86 111-4428  
+27(0)12 841-0320  
Facsimile: +27 (0) 86 692-9643

# PRODUCT BRIEF

## J4860x-C

## HP Compatible 1000Base-ZX SFP Transceiver with DDM Function

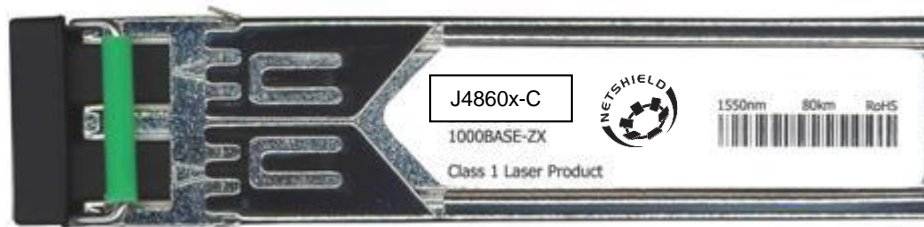

### Features:

- Operating data rate up to 1.25 Gbps
- Hot-pluggable SFP footprint
- 1550 nm DFB laser transmitter
- Transmission distance up to 80 km over 9 micron single mode fiber
- Duplex LC connector
- Low power dissipation
- Digital diagnostic monitoring interface is compliant with SFF-8472
- Compliant with SFP MSA Specification
- RoHS compliance

### Product Description:

This high performance HP compatible small form factor hot pluggable fiber optic transceiver is designed for single-mode fiber (SMF) and operates at a nominal wavelength of 1550 nm. It is equipped with SFP 20-pin connector to allow hot plug capability. This optical transceiver consists of two sections: the transmitter uses a 1550 nm DFB laser, the receiver section uses an Integrated InGaAs Detector Preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC. In addition, the transceiver is compliant with SFP Multi-Source Agreement (MSA) Specification and SFF-8472.

## Applications :

- Gigabit Ethernet Switches and Routers
- Fibre Channel Switch infrastructure
- XDSL applications
- Metro Edge Switching

## Product specifications:

Maximum Data Rate	1.25 Gbps
Wavelength	1550 nm
Fibre Type	SMF
Connector Type	LC
Distance	80km
Power Supply	3.3 V
Operating Temperature	0 °C to 70 °C (Commercial), -40 °C to 85 °C (Industry), -5 °C to 85 °C (Extended)
Cabling Type	Ethernet 1000Base-ZX
Status Indicators	Link activity, link OK
Provided Interfaces	1 x network - Ethernet 1000Base-ZX - LC single-mode x 2
Compatible Slots	1 x SFP (mini-GBIC)
Dimensions	5.80 x 1.30 x 1.30 cm
Weight	0.0168 kg